


STATS GROUP

SureSafe™

Leak-Tight Vapour Barrier




STATS SureSafe™ plugs provide a simple and effective low pressure isolation solution, allowing hot work activities to be carried out safely. Suitable for pressures from ambient to up to 10 bar, the plugs provide assurance of a secure, leak-tight vapour barrier and will be supplied with mechanical or hydraulic activation depending upon size. Integrated taper locks together with a vent port for pressure monitoring and, if required, purging operations protect personnel and the worksite by minimising the risks from unexpected pressure build-up.

Benefits

- Quick and safe to install
- Safe isolation during hot work activities
- Solid rubber compression seal combined with taper locks provide assurance against the risks from unexpected pressure build-up
- Vent port for downstream monitoring, venting and purging operations
- Vent port can be locked into gauge to reduce risk of damage to vent hose
- Significant track record
- Pipeline stress verification/assurance provided as standard

Key Features

- Size range: 3" to 48"
- Hydraulically activated above 6"
- Pressure range: up to 10bar
- Leak-tight Nitrile (NBR) elastomeric seal (alternative seal material available to suit application)
- Integrated taper grip locks
- Lightweight tool
- Temperature range: 0°C to 100°C

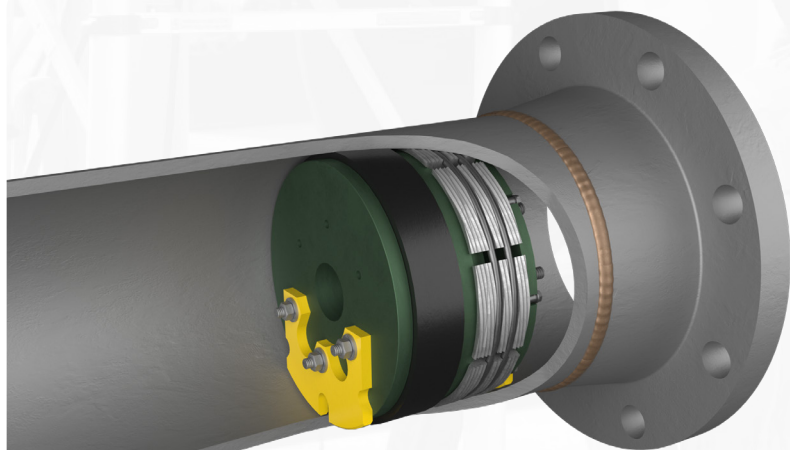

STATS GROUP

MANAGING PRESSURE, MINIMISING RISK